


# IP-802/1602 KVM SWITCH

Cost Efficient Local & Remote  
Console KVM Switching Solutions



- PS/2 or USB connection
- Control of up to 128 Servers
- Single or 2 user options
- Multiple ports

IP-802/1602 Global server management solutions with keyboard, video and mouse access over IP from anywhere in the world.

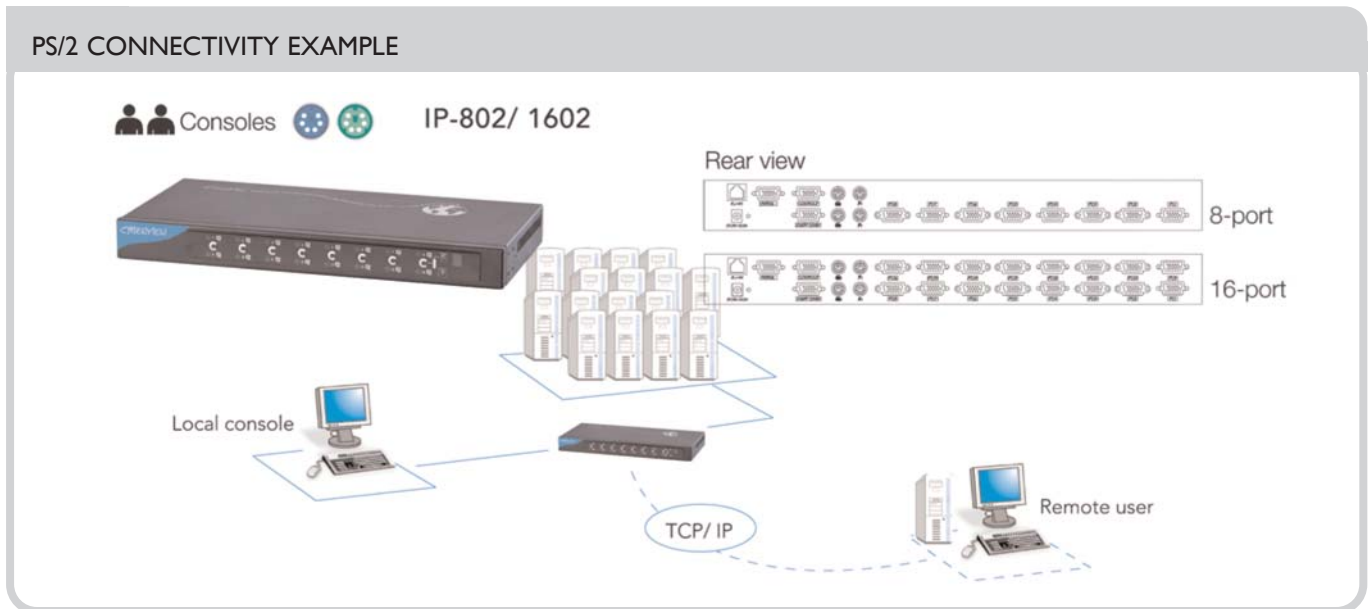

**THE CYBERVIEW SOLUTION...**

CyberView offers its users a flexible, space saving, cost effective method of managing multiple servers from a single unit, either locally within the data centre, or remotely via the World Wide Web using secure IP access.

CyberView is available in 1U and 2U height options, depths include 440mm for 600 deep racks or 650mm for 800 deep racks, with complete unit configuration flexibility of simply LCD drawer; Keyboard drawer; LCD Keyboard Drawer or LCD Keyboard Drawer with KVM (Keyboard, Video and Mouse) switch.

To cater for today's ever demanding working environments and applications CyberView is available in 15, 17 or 19" LCD screens with a wide selection of keyboard layouts and languages, including vendor application specific units i.e. full SUN Microsystems Solaris v10 compatibility when using our S Series solutions.

**KVM Specification**

MODEL NUMBER	-IP802 / -IP1602 / -IPS802 / -IPS1602
PC ports	8 / 16
Console ports	1
PC selection	On screen display menu
LED	1 bank LED
	8/16 online LED green
	8/16 selected LED red
OSD control	yes
Scan intervals	5 – 99 seconds
Keyboard & mouse em.	PS/2 or USB
Vga resolution (max.)	Local 1600x1200, remote 1280x1024
Cat.5 cable length (max)	-----
Bandwidth	200mhz
Cascade level	8 levels
PC connections (max)	120/128
Local console ports	1
Remote console ports	1
Rem. Console connector	RJ45 8p8c
Serial port	1
Remote web based access	Internet, lan/wan, dial up modem
Remote browser support	Microsoft IE, Netscape Navigator, Mozilla
Data encrypted	Secure socket layer SSL v2 / 23

**Size Specification**

UNIT TYPE	IP-802	IP-1602
Unit Dimensions (Cm)	43.6 X 21 X 4.4	43.6 X 21 X 4.4
Packaged Dimensions (Cm)	47 X 30 X 8	47 X 30 X 8
Unit Weight (Kg)	4.5	5
Packaged Weight (Kg)	5	6

**Power Supply**

POWER SUPPLY	
Remote Adapter	1 10v-220v Ac Input - 12v 5a Output
Adapter Size	10.8(L) X 6.1 (W) X 3(H) Cm
Cable Length (Mains To Adapter)	182cm
Cable Length (Adapter To Unit)	180cm
Safety Approval	UI / Ce