

# USB PS/2 KVM SWITCH


Cost Efficient Local & Remote Console KVM Switching Solutions

- PS/2 or USB connection
- Control of up to 128 Servers
- Single or 2 user options
- Multiple ports



**CyberView -401/801/802/1601/1602 -S801/S802/S1601/S1602** Our CV series offers a wide range of choices including 4, 8, or 16 port KVM switching, PS/2 or USB connection and single or 2 user options. You can cascade to 8 levels which means you have control of upto 128 servers.

### PS/2 CONNECTIVITY EXAMPLE

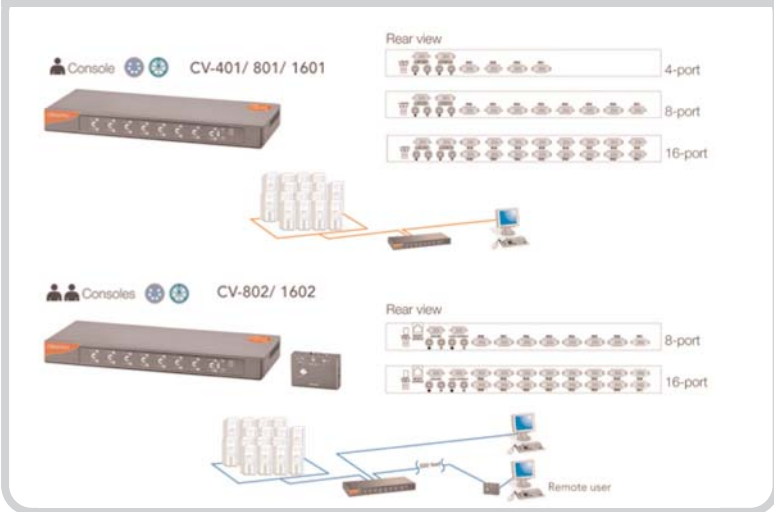


### THE CYBERVIEW SOLUTION...

CyberView offers its users a flexible, space saving, cost effective method of managing multiple servers from a single unit, either locally within the data centre, or remotely via the World Wide Web using secure IP access.

CyberView is available in 1U and 2U height options, depths include 440mm for 600 deep racks or 650mm for 800 deep racks, with complete unit configuration flexibility of simply LCD drawer; Keyboard drawer; LCD Keyboard Drawer or LCD Keyboard Drawer with KVM (Keyboard, Video and Mouse) switch.

To cater for today's ever demanding working environments and applications CyberView is available in 15, 17 or 19" LCD screens with a wide selection of keyboard layouts and languages, including vendor application specific units i.e. full SUN Microsystems Solaris v10 compatibility when using our S Series solutions.

### USB CONNECTIVITY EXAMPLE

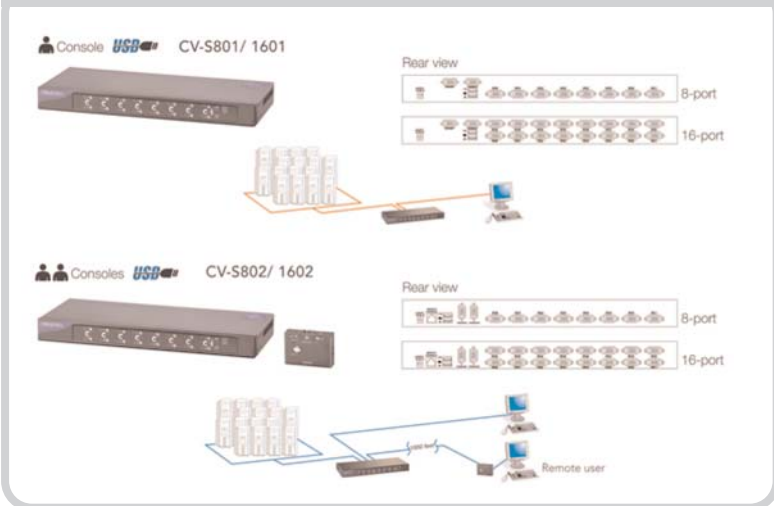

**KVM Specification**

MODEL NUMBER	-801 / -S801 / -1601 / -S1601	-802 / -S802 / -1602 / -S1602	
		Local Console	CAT5 Remote Console
PC ports	8 / 16	8 / 16	N/A
Console ports	1	1	1
PC selection	on screen disp./ hot keys / push button	on screen display menu / hot keys / push button	
LED	1 bank LED	1 bank LED	1 power LED green
	8/16 online LED green	8/16 online LED green	1 status LED red
	8/16 selected LED red	8/16 selected LED red	-----
OSD control	yes	yes	
Scan intervals	5 - 99 seconds	5 - 99 seconds	
Keyboard & mouse em.	PS/2 or USB	PS/2 or USB	
VGA resolution (max.)	1920 x 1440	1920 x 1440	1600 x 1200
Cat.5 cable length (max)	N/A	N/A	1000 feet
Bandwidth	200mhz	200mhz	150mhz
Cascade level	8 levels		8 levels
PC connections (max)	120/128	120/128	

**Size Specification**

UNIT TYPE	CV-401	CV-801/S801	CV-1601/S1601
Unit dimensions (cm)	43.5 x 18 x 4.45	43.5 x 18 x 4.45	43.5 x 18 x 4.45
Packaged dimensions (cm)	30 x 47 x 8	30 x 47 x 8	30 x 47 x 8
Unit weight (kg)	3.5	3.5	4
Packaged weight (kg)	4	4	5

**Power Supply**

POWER SUPPLY	
Remote plug adapter	1 110v-220v ac input - 12v 1a output
Safety approval	UL/ CE